



Seamlessly
integrated.

The sensor range from Belimo.

BELIMO[®]

Sensors by Belimo. The perfect complement to actuators and valves.



Belimo, the global market leader in the development and production of actuators and control valves for heating, ventilation and air-conditioning (HVAC) systems, has now opened a new chapter in its company history by adding an innovative line of sensors to its product range.

The sensors from Belimo have been designed to ensure the highest quality and reliability, easy installation and seamless compatibility with all major building automation and control systems (BACS). As a complete field level device solution provider, we offer a range that includes sensors for measuring temperature, humidity, pressure, CO₂ and volatile organic compounds (VOCs) for outdoor, pipe and duct applications. Sensors from Belimo are backed with first-class service and support.

Seamless integration, reliable and intuitive.

The sensor range is the result of Belimo's experience and knowledge in the HVAC industry and our continuous focus on providing added value to our customers. The innovative design offers easy installation and seamless integration to ensure optimal system performance.



Seamless

Utilising innovative technology, the sensors are designed to work seamlessly with all major building automation and control systems ensuring optimised solutions in terms of performance and energy efficiency.



Reliable

The well-known high quality guarantees reliable and accurate readings over the complete life cycle of the building. The highly resistant sensors also carry a 5-year warranty and conform to NEMA 4X / IP65 requirements.



Intuitive

Installation and commissioning are done in just a few simple steps thanks to the compact modular design featuring a screwless snap-on cover that can be opened and closed without tools and a detachable mounting plate which serves as drilling template.

"I have worked with Belimo for over 17 years. The company has always exceeded my expectations regarding quality, customer service and reliability. The new sensors which can be integrated via BACnet and Modbus are a very interesting addition to the product range from Belimo.

As proven by the innovative Energy Valve, these products provide a significant added value in building automation."

**Andreas Wechner, Project Manager,
Trane (Schweiz) GmbH**

Innovation for your peace of mind.

Snap-on cover

First sensor housing on the market offering screwless no-tool design and NEMA 4X / IP65 protection allowing quicker and more reliable installation.



BACnet and Modbus communication protocols

Provide superior application data access and allow for easy commissioning and parameterisation.




Detachable mounting plate

Designed to be used as a drilling template for easy mounting and installation.



NEMA 4X / IP65 and UL compliance

All sensors from Belimo with snap-on cover housing fulfill these requirements. These sensors are suitable for demanding and outdoor applications including dirt, dust, humidity, condensation, rain and snow.

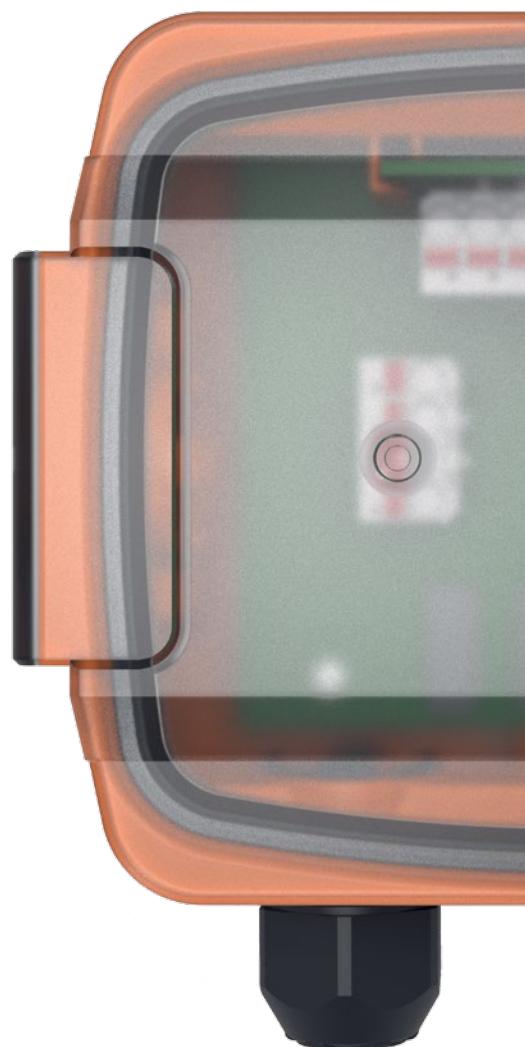



Universal design enclosure

Ensures a streamlined product range, which makes the product selection process and installation quick and easy.

Modular conduit fitting

Suitable for additional wiring options and mounting configurations.

Plug-in terminals

Allow tool-less connection and maximum pull-out force, saving time during wiring and ensuring maximum contact reliability.

Output protection

Reverse-polarity protected to prevent damage caused by incorrect wiring.

Sensors from Belimo feature a unique uniform enclosure, which allows quick installation and makes them fully compatible with all major building automation and control systems. This design blends seamlessly into the product range from Belimo (actuators, valves and sensors). One single enclosure design meets NEMA 4X / IP65 requirements and streamlines the product range.

Humidity and temperature.

With a complete range of sensors, Belimo is now your single source for HVAC field devices. Actuators and valves are complemented by an extensive range of sensors for temperature, humidity, air quality and pressure.

Belimo provides standardisation, streamlined ordering, on-time delivery directly to the building project site, easy installation and various cable fittings along with quick setup, saving you time and money. The attractive uniform design makes the sensors easy to use and install and ensures high reliability. Furthermore, the characteristic orange housing allows the sensors to be immediately identified as products from Belimo. This is particularly useful in the commissioning phase.



Humidity sensors

Controlling humidity in buildings is critical to occupant comfort. It is also important to protecting building infrastructure, production processes, stored goods and museum artwork. The range of durable duct, outdoor air and condensation sensors is designed to provide energy-efficient monitoring and is compatible with all major BACS. High-quality sensors that perform reliably provide high accuracy and repeatability. Combined temperature and humidity sensors provide a flexible and cost-effective solution.



FEATURES

- Complementary Metal Oxide Semiconductor (CMOS) based polymer-capacitance sensor with an accuracy of $\pm 2\%$ relative humidity as standard and long-term drift $<\pm 0.25\%$ not affected by high humidity and contaminants
- Multisensor with selectable output-measurement values: relative humidity, absolute humidity, enthalpy and dew point
- Up to 4 field-selectable temperature measurement ranges provide flexibility during commissioning, simplify logistics and reduce stock storage

PRODUCT SERIES

Outdoor Air, Duct and Condensation

Temperature sensors

Temperature is one of the most important measurement values in building control. Accurate and reliable temperature readings are essential for optimal building comfort and energy efficiency. Outdoor air, duct and pipe temperature sensors are designed for easy installation and are compatible with all major BACS.

FEATURES

- Variety of output signals, passive NTC and RTD, 0...5/10 V, 4...20 mA ensure seamless connection to all major BACS on the market
- Up to 8 field-selectable measurement ranges to simplify logistics and reduce stock storage, providing flexibility
- Sintered moisture protection coating on all duct, immersion, and cable sensors protects against condensation and mechanical stress and vibrations

PRODUCT SERIES

Outdoor, Duct Averaging, Duct/Immersion, Strap-on, Cable, Frost Protection



Air quality and pressure.

Air quality sensors

Air quality sensors from Belimo, such as CO₂ and VOC sensors, guarantee optimal indoor air quality with increased comfort levels and maximised energy savings in buildings. Integrated temperature and humidity sensors are available.



FEATURES

- Dual-channel CO₂ sensor based on NDIR technology. The additional reference channel allows compensation of the long-term drift, providing precise accuracy and long-term stability
- Wide range of combined multisensors for CO₂, humidity, temperature and VOC offer reduced labour and material costs
- Dual-channel self-calibration technology allows the CO₂ sensors from Belimo to be used for all types of buildings and applications where the ABC method (automatic background calibration) can not be used

PRODUCT SERIES

- CO₂,
- CO₂ + Temperature,
- CO₂ + Humidity + Temperature,
- CO₂ + VOC,
- CO₂ + VOC + Temperature,
- CO₂ + VOC + Mix CO₂/VOC + Temperature

Pressure sensors

Accurate pressure measurement is important for optimal HVAC system performance. Pressure sensors from Belimo measure very low to high pressures in air, water and refrigerants. The sensors offer precise measurement of pressure, differential pressure and volumetric flow with high accuracy for reliable monitoring. Selectable measuring ranges are available for application flexibility.



FEATURES DIFFERENTIAL PRESSURE SENSOR FOR AIR

- 8 field-selectable measurement ranges for differential pressure output
- Direct volume-flow-output equations are preprogrammed for most major fan manufacturers
- Excellent zero point stability and high accuracy
- Auto-zero or manual-calibration option
- LCD display optional

FEATURES DIFFERENTIAL PRESSURE SWITCH FOR AIR

- Field-adjustable switch point
- Over 10^6 switching cycles

FEATURES DIFFERENTIAL PRESSURE SENSOR FOR WATER

- Highly stable resistive sensor element on ceramic substrate
- Rugged stainless-steel housing

FEATURES PRESSURE SENSOR FOR WATER AND REFRIGERANTS

- Resistive sensor element on stainless-steel membrane
- All wetted material stainless-steel


PRODUCT SERIES

Differential Pressure Air, Differential Pressure Switch Air, Differential Pressure Water, Pressure Water and Refrigerants

Flow.

Flow sensors

Reliable measurement of flow plays an important role in maximising HVAC system efficiency and conserving energy. Inline flow sensors from Belimo utilise ultrasonic transit-time technology to provide accurate and repeatable water-flow measurement. Their compact size and insensitivity to dirt make them ideal for use with HVAC chilled water, hot water and water/glycol solutions at temperatures ranging from -20 to 120 °C. The sensors are fabricated from corrosion-resistant materials, ensuring reliable operation and extended product life.

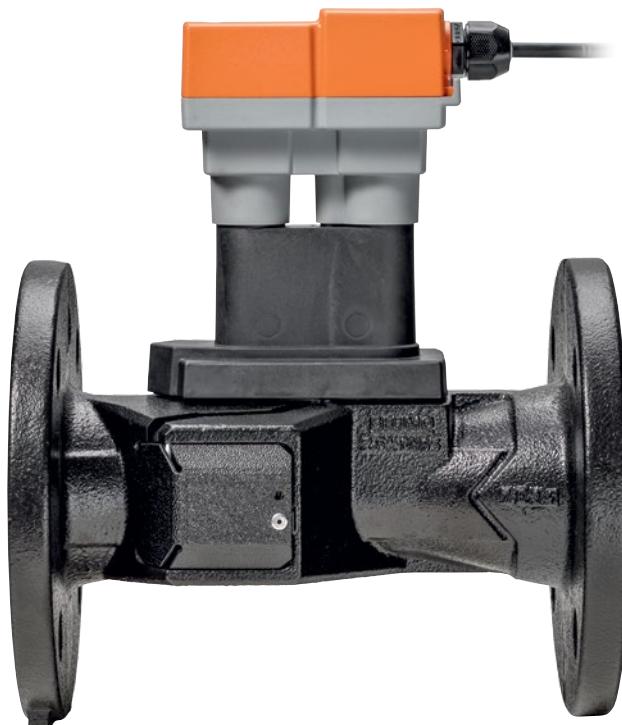

FEATURES

- Multipoint wet calibrated to ensure accuracy and repeatability
- Patented temperature and glycol compensation logic assures accuracy over the whole temperature and glycol concentration range
- $\pm 2\%$ accuracy of reading and $\pm 0.5\%$ repeatability ensure accurate and precise flow measurement
- Ultra compact size: with a short inlet length of $5 \times DN$ and no output-length requirements, the ultrasonic flow sensor from Belimo can be installed even where space restrictions are very tight
- Low power consumption of 0.5 W saves energy and transformer capacity

PRODUCT SERIES


Ultrasonic Flow (Volumetric Flow)

A seamless approach.

For over 40 years, Belimo has been continuously developing and expanding its range of new products and technologies to improve efficiency in buildings. The new range of sensors stems from the release of the Belimo Energy Valve™, an innovative solution integrating sensors.

The Belimo Energy Valve™ is a pressure independent valve that measures and manages coil energy by using an embedded ultrasonic flow sensor, along with supply and return water-temperature sensors. The Belimo Energy Valve™ also has the patented Power Control and the built-in Belimo Delta-T manager logics, which monitors coil performance and optimises the available energy of the coil by maintaining a minimum differential temperature.

Since its introduction, the Belimo Energy Valve™ has won many major HVAC industry awards worldwide.

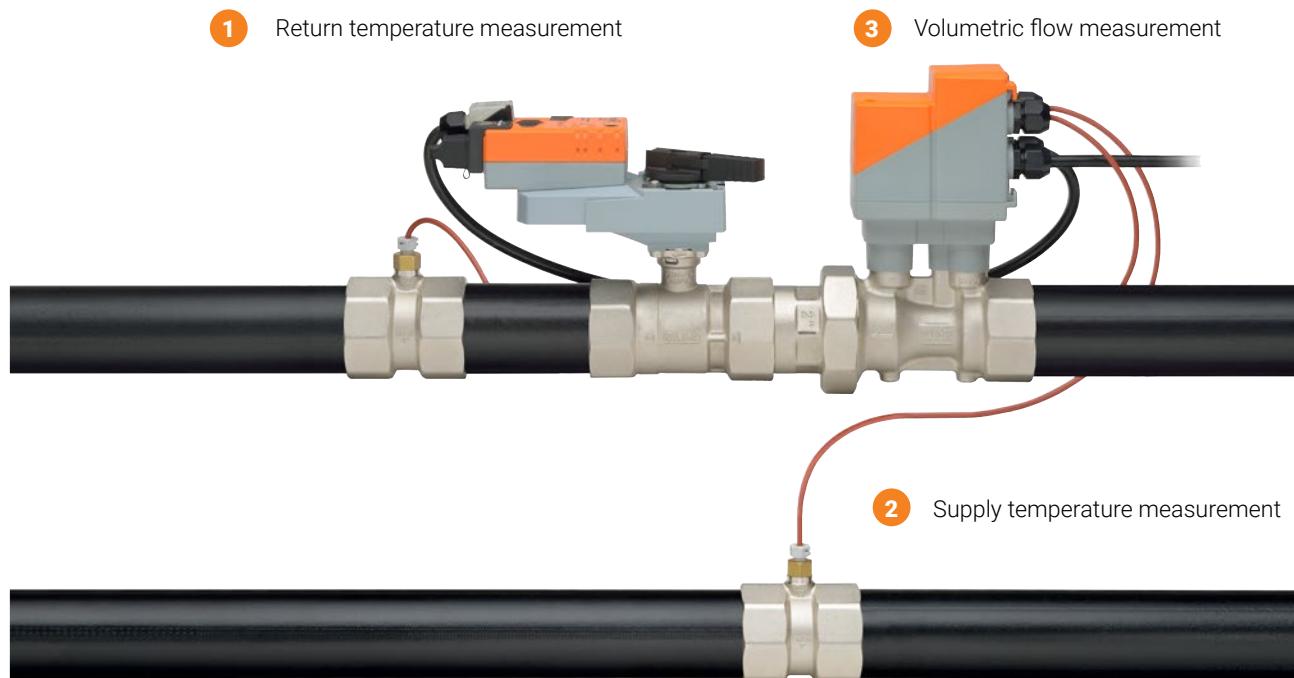

Helpful tools for seamless product selection.

A variety of product specification and selection tools are available for planning and designing energy-efficient solutions for buildings.

SelectPro – Sizing and selection made simple

SelectPro is a quick and simple tool for accurately sizing and selecting valves and actuators. Now also including sensors, it allows the selection of all field devices with one single tool.

Additional features

- View and print data sheets and mounting instructions.
- Export to the Belimo web shop.
- Create, store and upload project schedules with product tagging information.
- Search for 1:1 replacement products from other manufacturers

SelectPro can be downloaded from

https://www.belimo.com.hk/en_GB/solutions/sizing-and-selection-tools



Belimo website – Overview of products and solutions

The Belimo website is a useful platform to get a good overview of the new range of sensors and existing actuators and valves from Belimo. The latest information and useful resources are available for download. In addition, it offers the possibility to seamlessly select and order products via the web shop.




Retrofit App – Mobile selection for easy and convenient replacement

The Belimo Retrofit App is a mobile tool that can be used to quickly and easily find replacement solutions for valves, actuators and sensors. It is available for free download via Google play, App Store and web version of Retrofit App is also available on <https://toolbox-retrofit.xiag.ch/retrofit#actuators/air>

The tool allows

- Storage of projects.
- E-mailing a product selection for a project.
- Access to documentation such as data sheets and mounting instructions.

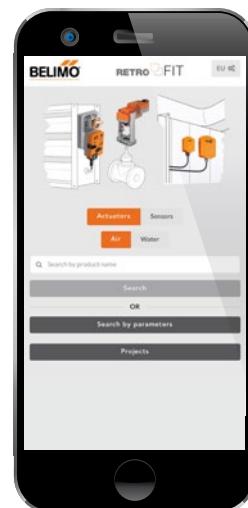

Sensors from Belimo at a glance.

The following tables provide an overview of Belimo's wide range of sensors for each application and their technical specifications.

Temperature

Application	Type code	Output signal	Measurement range ¹ Factory settings		Probe length (mm)	Application/comment
			Passive	Active		
Outdoor	01UT	■	-35 ... +50 °C		-	-
	22UT	■	-50 ... +50 °C		8	-
Duct/ Immersion	01DT	■	Sensor dependent		-	50, 100, 150, 200, 300, 450
	22DT	■	0 ... +160 °C		8	50, 100, 150, 200, 300, 450
Duct averaging	22MT	■	-20 ... +80 °C		8	6000
Strap-on	01ST	■	-35 ... +100 °C		-	-
	01HT	■	-35 ... +90 °C		-	-
	22HT	■	0 ... +100 °C		8	-
Cable	01CT	■	-35 ... +100 °C		-	2000
	22CT	■	0 ... +160 °C		8	2000
Frost protection	01DTS	■	-10 ... +12 °C		-	3000, 6000

Humidity

Application	Type code	Measured values						Output signal	Measurement range			Application/comment				
		Humidity	Temperature	Enthalpy	Dew point	Abs. humidity	Condensation		Active	Modbus RTU	BACnet MS/TP	Switch	Humidity	Temperature ¹⁾ Factory settings	Multirange (selectable)	
Outdoor	22UTH	■	■	■	■	■	■	■	■	■	■	■	0 ... 100% rH	-20 ... +80 °C	4	<ul style="list-style-type: none"> - Outdoor sensor humidity/temperature - Room sensor humidity/temperature with NEMA 4X / IP65 protection - Option: weather protection
 Duct	22DTH	■	■	■	■	■	■	■	■	■	■	■	0 ... 100% rH	-20 ... +80 °C	4	Duct sensor humidity/temperature
 Condensation	22HH	—	—	—	—	—	■	—	—	—	—	—	—	—	—	Condensation sensor Option: external sensor

Flow

Application	Type code	Measured values		Output signal	Media	Measurement range		Application/comment
		Flow (Volumetric flow)	Active			Water/glycol Mixtures	Flow (Volumetric flow)	
 Pipe	FM...R-SZ	■	0 ... 10V	■	■	25, 46, 83, 130, 180, 345 l/min	—	Dynamic range: 1:5
	FM...F-SZ	■	0 ... 10V	■	■	480, 680, 1200, 1875, 2700 l/min	—	Dynamic range: 1:5

Sensors from Belimo at a glance.

Air Quality

Application	Type code	Measured values				Output signal	Measurement range			Options	Application/comment			
		CO ₂	Temperature	Humidity	VOC		Mix CO ₂ /VOC	Active	Modbus RTU	BACnet MS/TP	CO ₂	Temperature	Humidity	Passive Temperature
Duct	22DC-11	■				■			0 ... 2000 ppm	—	—	—	—	Duct sensor CO ₂
	22DC-110L	■				■			0 ... 2000 ppm	—	—	NTC10k (10k2)	—	Duct sensor CO ₂
	22DTC	■	■			■			0 ... 2000 ppm	—	—	—	—	Duct sensor CO ₂ , T
	22DTC-1105	■	■			■			0 ... 5000 ppm	—	—	—	—	Duct sensor CO ₂ , T
	22DTM	■	■	■		■	■	■	0 ... 2000 ppm	0 ... +50 °C	0 ... 100% rH	—	—	Duct sensor CO ₂ , H, T
	22DTM-1106	■	■	■		■	■	■	0 ... 2000 ppm	0 ... +50 °C	0 ... 100% rH	—	■	Duct sensor CO ₂ , H, T
	22DCV	■		■	■	■			0 ... 2000 ppm	—	—	—	—	Duct sensor CO ₂ , VOC, CO ₂ /VOC, T
	22DCM	■	■	■	■	■			0 ... 2000 ppm	0 ... +50 °C	—	—	—	Duct sensor CO ₂ , VOC, T
	22DCK	■	■	■	■	■	■	■	0 ... 2000 ppm	0 ... +50 °C	—	—	—	Duct sensor CO ₂ , VOC, CO ₂ /VOC, T

Pressure

Application	Type code	Measured values			Output signal		Media	Messbereich, ²	Options	Application/comment					
		Differential pressure	Relative pressure	Flow ³ (Volumetric flow)	Active	Modbus RTU	MP Bus	Switch	Air	Water	Refrigerants	Pressure	Multirange (selectable)	Auto-zero	Display
Duct	22ADP	■		■	■	■		■				250 Pa, 2500 Pa, 7000 Pa	■	■	■ Differential pressure sensor air
															
Duct	MS	■					■	■				- 20 ... 600 Pa			VAV (Variable Air Volume) systems
															
Duct	01APS	■					■	■				20 ... 300 Pa, 50 ... 500 Pa, 200 ... 1000 Pa, 500 ... 2500 Pa			Duct differential pressure switch air
															
Pipe	22WP		■		■			■	■			4, 6, 10, 16 bar			Pipe pressure sensor water and refrigerants
															
	22WDP	■		■				■				1, 2.5, 4, 6 bar			Pipe differential pressure sensor water

All sensors from Belimo feature:

Active: 0...5/10 V, 4...20 mA

Passive: PT100, PT 1000, Ni 1000, NiTK5000, Ni 891, NTC10K, NTC10K

Precon, NTC20K

Communication: Modbus RTU, BACnet MS/TP

Supply voltage: DC 15...24 V, AC 24 V

Protection: NEMA 4X / IP65 (except for 01APS and FM: IP54, MS: IP40)

Who we are and what we want.

Belimo is global market leader in the development, production and marketing of actuator solutions for controlling heating, ventilation and air conditioning systems. Actuators, control valves and sensors make up the company's core business.

Belimo delivers more than just products. We support our customers with innovative, efficient and energy-optimizing solutions that bring success to both our customers and ourselves. We are close to our customers throughout the world; we speak their language, and we understand them. Everything we do gives them the reassurance that they have chosen the very best.



5-year warranty



On site around the globe



Tested quality



Short delivery time



Comprehensive support



Complete product range